



Fabric Tape AG-2300

Conductive Silver Fabric

Data Sheet

Product Description

3M™ Conductive Silver Fabric Tape AG-2300 consists of:

- Silver-coated conductive fabric
- Conductive acrylic adhesive
- Supplied on a removable liner for easy handling and die cutting

3M Conductive Silver Fabric Tape AG-2300 is available in standard size and custom widths and lengths.

- Widths from 6mm to 1000mm
- Standard length is 50M.
- Longer lengths up to several times normal length, dependent upon width. Check with a 3M sales representative.

Applications

3M Conductive Silver Fabric Tape AG-2300 is typically used for applications requiring excellent electrical conductivity from the application substrate through the adhesive to the conductive fabric backing. Common uses include grounding and EMI shielding in equipment, components, shielded rooms, etc.

Shielding Effectiveness

Many factors determine the shielding effectiveness of a conductive adhesive tape, including type and thickness of the conductive layers, adhesive strength, degree of contact, smoothness of application surface, frequency, etc. For 3M Conductive Silver Fabric Tape AG-2300, typical shielding effectiveness is in the range of 65dB to 70dB when tested according to ASTM D4935 standard.

Typical Values

Properties	Typical Value
Type of Backing	Silver-coated conductive fabric
Type of Adhesive	Conductive acrylic adhesive
Total thickness (backing plus adhesive)	0.10 mm (4.0 mils)
Breaking strength ¹	22 kg/25 mm (50 lb/in)
Elongation ¹	20%
Adhesion strength ¹	1100 g _f /25 mm (39 oz/in)
Electrical resistance through adhesive ²	0.005 Ω
Shielding effectiveness ³	Refer to attenuation chart

Footnotes:

1. ASTM-D-1000 Test Method


2. MIL-STD-202 Method 307 maintained at 5 psi (3,4 N/cm²) measured over 1 in² surface area. Conductive particles in the adhesive provide the electrical path between the application substrate and the conductive backing.

3. ASTM-D-4935 Test Method

Shielding Effectiveness

AG2300

Test Method: ASTM D4935

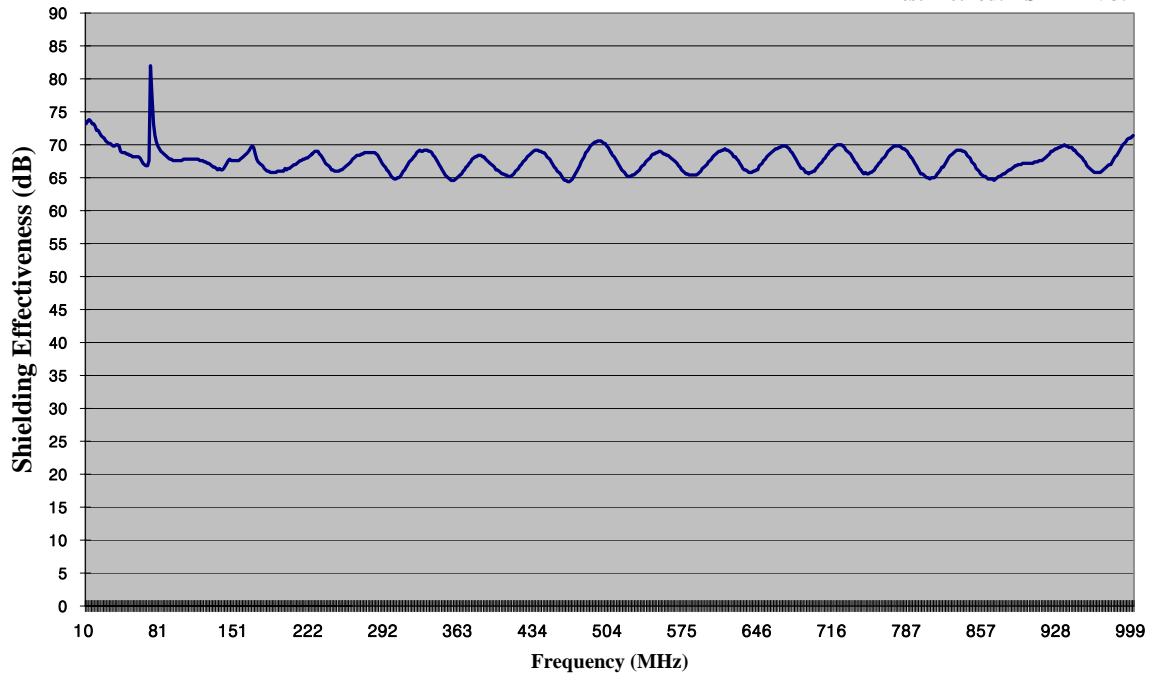

3M is a trademark of 3M Company.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability. This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**

3M

Electrical Markets Division

6801 River Place Blvd.

Austin, TX 78726-9000

www.3M.com/emc

Litho in USA

© 3M 2006 78-8126-9890-6-A