


TG2030 - 24-21.01-1 - PT

Ultra Soft Thermal Pad

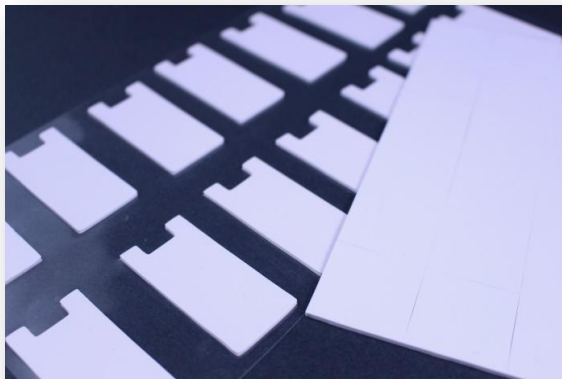


Features

- Low oil-bleed
- Ultra soft and high compressibility
- Electrical insulation
- As a buffer in electronics

Applications

- Electronic components: IC, CPU, MOS, LED,
- Mother Board, Power Supply, Heat Sink, LCD-TV,
- Notebook, PC, Telecom device, Wireless hub,
- DDR II Module, DVD Applications, Hand-set applications etc.

Thermal Resistance VS. Pressure VS. Deflection

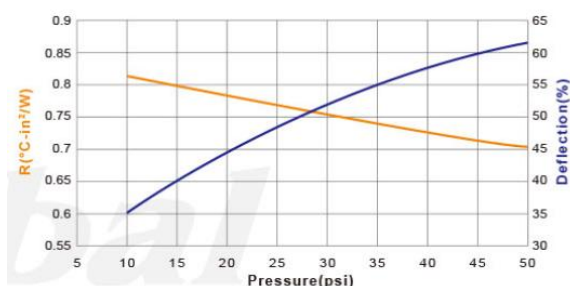


Pressure (psi)	R(°C - in ² /W)	Deflection(%)
10	0.82	35
30	0.76	53
50	0.71	62

Properties

- ◆ REACH Compliant
- ◆ RoHS Compliant
- ◆ UL Compliant

Thermal Conductivity: 2.0 W / mK

Hardness: 30 (Shore 00)



Testing sample thickness: 1.0mm


In "Thermal resistance V.S. Pressure V.S. Deflection" chart, TG2030 provides low thermal impedance. The pressure gets higher, the thermal impedance gets lower, and deflection percentage gets higher. TG2030 provides good compliance and softness.

Properties	TG2030	Unit	Tolerance	Test Method
Thermal Conductivity	2	W / mK	±0.2	ASTM D5470
Thickness	0.5~5.0	mm	-	ASTM D374
	0.0197~0.1969	inch	-	ASTM D374
Color	White	-	-	Visual
Flame Rating	V-0	-	-	UL 94
Dielectric Breakdown Voltage	16	KV / mm	±1.6	ASTM D149
Weight Loss	<1	%	-	ASTM E595
Density	2.4	g / cm ³	±0.2	ASTM D792
Working Temperature	-45~+200	°C	-	-
Volume Resistance	>10 ¹⁰	Ohm-m	-	ASTM D257
Elongation	300	%	-	ASTM D412
Tensile Strength	1	Kgf / cm ²	-	ASTM D412
Standard Shape	Sheet ones	-	-	-
Hardness	30	Shore 00	±10	ASTM D2240

Need samples?



Pre-cut for different shapes



1. Series Number
2. Size (mm): X = 24, Y = 21.01, Z = 1
3. Authorized Distributor: PT = Prostech

T-Global Technology Co., Ltd

No. 33, Ln. 50, Daren Rd., Taoyuan City 330, Taiwan

TEL: +886-3-3618899

www.tglobalthermal.com

Thermal Interface Materials: Thermal Pad, Thermal Tape, Thermal Grease, Ceramic Heat Spreader

FAX: +886-3-3665666

www.tglobal.com.tw



Version4 20170701