

June, 2018


3M™ High Temperature Aluminum Foil/Glass Cloth Tape 363

Product Description

3M™ High Temperature Aluminum Foil/Glass Cloth Tape 363 can be used as a high temperature, heat reflective, protective wrap for certain cables and other components in aerospace and industrial applications. Also comes in an easy-release film liner (3M™ High Temperature Aluminum Foil/Glass Cloth Tape 363L).

Product Features

- Can easily be die-cut into special sizes or shapes.
- Light, flexible construction – easily applied to a variety of irregular shapes.
- Performs continuously from -65°F (-54°C) to 600°F (316°C).
- Meets the requirements of FAR 25.853(a).
- Meets the surface flammability and smoke density requirements for all categories and material functions as specified by NFPA 130 - Per ASTM E162 and ASTM E662.
- Exhibits low, average, and peak rates of heat release - per ASTM E1354.
- Generates low levels of toxic gas in both flaming and non-flaming modes - per BSS-7239.
- Best results obtained when applied to a clean dry surface above 32°F (0°C), but can be applied at lower temperatures.

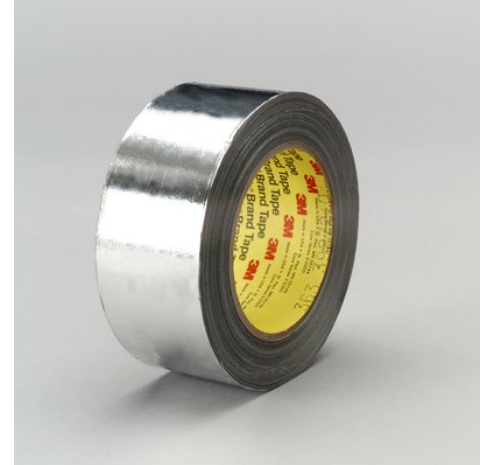

3M™ High Temperature Aluminum Foil/Glass Cloth Tape 363

Technical Information Note

The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Typical Physical Properties

| Property | Values | | Method |
|----------------------|--|-----------------|------------|
| Color | Silver | | |
| Total Tape Thickness | 0.19 mm | 7.3 mil | ASTM D3652 |
| Backing | Aluminum foil laminated to glass cloth | | |
| Adhesive | Silicone (transparent) | | |
| Approximate Weight | 0.0057 g/m/24 mm | 0.0114 lb/yd/in | |

| Backing Thickness (nominal) | | Notes |
|-----------------------------|---------|-------------|
| 0.025 mm | 1 mil | Foil |
| 0.06 mm | 2.4 mil | Glass Cloth |

Property: Backing Thickness (nominal)

Method: ASTM D3652

Typical Performance Characteristics

| Property | Values | | Method | Substrate |
|-----------------------|---------------|---------------|------------|-----------------|
| Peel Adhesion | 5.7 N/cm | 52 oz/in | ASTM D3330 | Stainless Steel |
| Tensile Strength | 236.4 N/cm | 135 lb/in | ASTM D3759 | |
| Elongation at Break | 7 % | | ASTM D3759 | |
| Temperature Use Range | -54 to 316 °C | -65 to 600 °F | | |

Available Sizes

| Property | Values | |
|----------------------|--------|-------|
| Standard Roll Length | 33 m | 36 yd |

Handling/Application Information

Application Ideas

- A heat reflective wrap, over insulation cables, instruments, or other high temperature sensitive materials.

3M™ High Temperature Aluminum Foil/Glass Cloth Tape 363

Storage and Shelf Life

Store under normal conditions of 60° to 80°F (16° to 27°C) and 40 to 60% R.H. in the original carton. To obtain best performance, use this product within 36 months from date of manufacture.

Industry Specifications

FAR 25.853(a)

Information

Technical Information: The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

Trademarks

3M is a trademark of 3M Company.

References

Safety Data Sheet (SDS)

https://www.3m.com/3M/en_US/company-us/SDS-search/results/?gsaAction=msdsSRA&msdsLocale=en_US&co=ptn&q=363

ISO Statement

This Industrial Adhesives and Tapes Division product was manufactured under a 3M quality system registered to ISO 9001 standards.

3M™ High Temperature Aluminum Foil/Glass Cloth Tape 363



Industrial Adhesives and Tapes Division
3M Center
St. Paul, MN 55144-1000
800-362-3550
www.3M.com

Please recycle.
© 3M 2019. All Rights Reserved.

The brands listed above are trademarks of 3M