


PT-A6200

Ultra Soft Thermal Pad

REACH

RoHS

UL

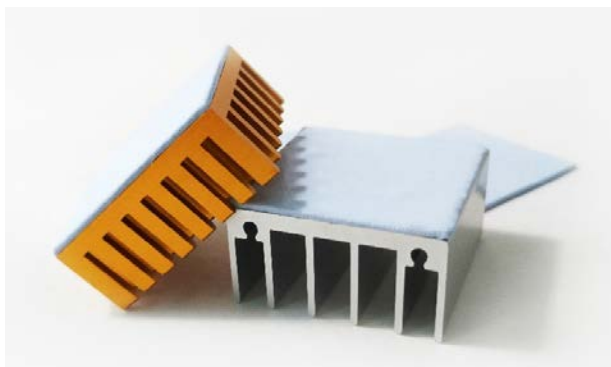


Features

- High thermal conductivity
- High compressibility and compliancy
- Natural tack

Thermal Conductivity : 6.2 W / mK



Hardness : 50 (Shore 00)




Applications

Best for high power applications

Electronic components: IC, CPU, MOS, LED, Mother Board, Power Supply, Heat Sink, LCD-TV, Notebook, PC, Telecom Device, Wireless Hub, DDR II Module, DVD Applications, Hand-set applications etc.

Thermal Resistance VS. Pressure VS. Deflection

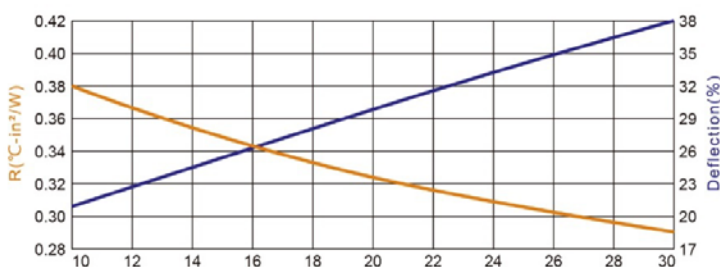

Pressure (psi)	R(°C-in²/W)	Deflection(%)
10	0.380	21
30	0.290	38

Properties

Properties	PT-A6200	Unit	Tolerance	Test Method
Thermal Conductivity	6.2	W / mK	±0.62	ASTM D5470
Thickness	0.5~8.0	mm	-	ASTM D374
	0.0197~0.315	inch	-	ASTM D374
Color	Blue	-	-	Visual
Flame Rating	V-0	-	-	UL 94
Dielectric Breakdown Voltage	6	KV / mm	-	ASTM D149
Weight Loss	<1	%	-	ASTM E595
Density	3.1	g / cm ³	-	ASTM D792
Working Temperature	-50 ~ +150	°C	-	-
Volume Resistance	1x10 ¹³	Ohm-m	-	ASTM D257
Elongation	50	%	-	ASTM D412
Standard Shape	Sheet ones	-	-	-
Hardness	50	Shore 00	±15	ASTM D2240

Need samples? **Pre-cut for different shapes**

T-Global Techonology Co., Ltd

Provide professional thermal engineering solutions and full range of products.

No. 33, Ln. 50, Daren Rd., Taoyuan Dist., Taoyuan City 330, Taiwan

T: +886-3-3618899 M: service@tglobal.com.tw W: www.tglobalcorp.com

version16

20190528